

Tact Switch Series



KLS7-TS6604 6x6 Tact Switch Series

ELECTRICAL



- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C



Dimension (unit: mm)

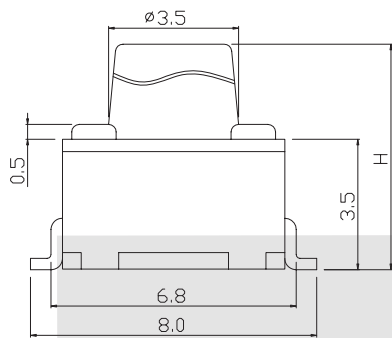

H
4.3
5.0
6.0
7.0
8.0

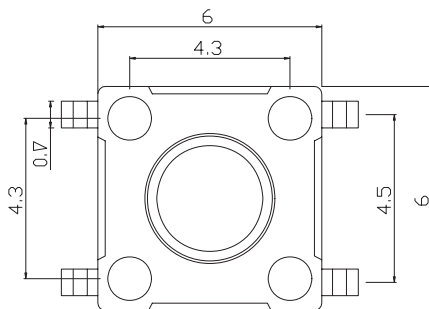

PCB LAYOUT

ORDER INFORMATION

KLS7-TS6604 -4.3- 180- T

Series No.

Height: 4.3mm/5.0mm/6.0mm/
7.0mm/8.0mm

Packing: B=Bulk T=Tape

Operating Force :180~250gf



Switch

Tact Switch Series



KLS7-TS6604B 6x6 Tact Switch Series

ELECTRICAL

- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C

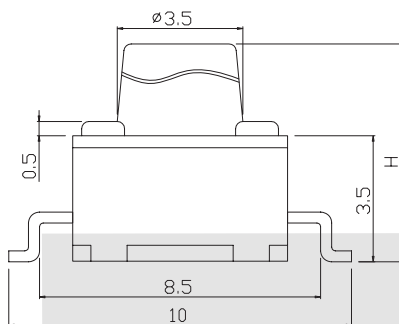

H
4.3
5.0
6.0
7.0
8.0

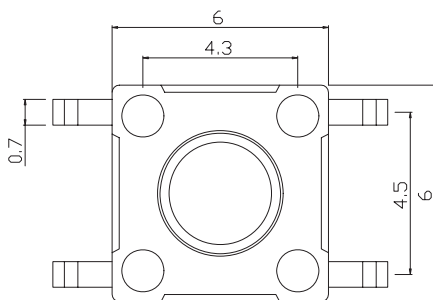

PCB LAYOUT

ORDER INFORMATION

KLS7-TS6604B -4.3- 180- T

Series No. _____ Packing: B=Bulk T=Tape
Height: 4.3mm/5.0mm/6.0mm/
7.0mm/8.0mm Operating Force :180~250gf