

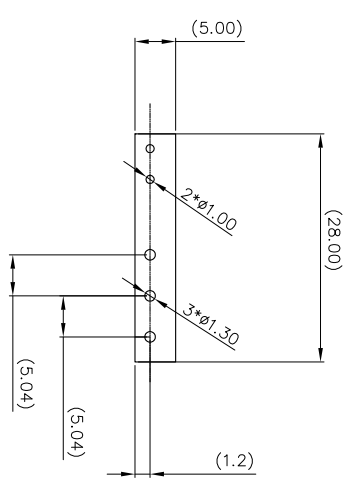


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

DRPS-1C

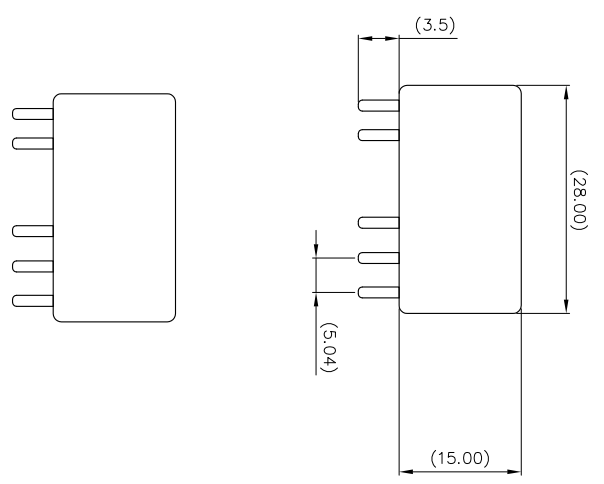

	尺寸公差(mm)				Tolerance
	0	>30	>60	>100	
Load current	~	~	~	~	0.05/10
Load voltage	30	60	100	150	±1%
Electrical life	~	~	~	~	±1%
Mechanical life	~	~	~	~	±1%
Contact resistance	~	~	~	~	±1%
Operate voltage	~	~	~	~	±1%
Release voltage	~	~	~	~	±1%
Key controlled symbol	~	~	~	~	±1%
Operating temperature(°C)	~	~	~	~	±1%
Dielectric strengths	~	~	~	~	±1%
Coil operating power	~	~	~	~	±1%
Max. allowable coil voltage	~	~	~	~	±1%

Load current	TC: 6A
Load voltage	TC: 250VAC/30VDC
Electrical life	≥100,000
Mechanical life	≥10,000,000
Contact resistance	≤50mΩ(24V,1A)
Operate voltage	DC: ≥75%Ue
Release voltage	DC: ≥5%Ue
Key controlled symbol	*
Operating temperature(°C)	-25°C ~ +85°C
Dielectric strengths	contacts: 1000VAC, 1Min (1mA) Between Coil and contacts: 4000VAC, 1Min (1mA)
Coil operating power	0.40W
Max. allowable coil voltage	110%(Ue)
Conform to RoHS	
Mark the height of the company LOGO	
Mark the height of the "CE"	
Printing for laser marking/printing content is clear ,no broken line/elect	
Seal literal reference according to the foot position in the drawing	
The words in the dotted box correspond to the list below	

MATERIAL: / SURFACE: /

MAT. NO.: /
STATUS: /
APPD: /
CHKD: /
DRAFT: /

NINGBO DEGSON ELECTRICAL CO., LTD
DRPS-XX-XX-06A(H)

SIZE: A4
TYPE: PRODUCT DRAWING
SCALE: 1:1
REV: TO
SHEET: 1/1