


I2C RTC-DS1307-AT24C32

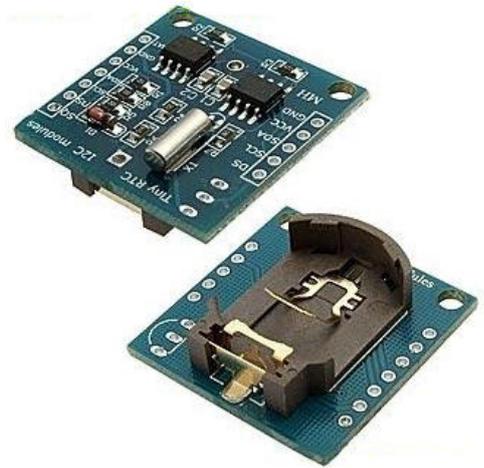

DS1307 I2C Real-Time Clock (RTC)

24C32 32K I2C EEPROM memory

Using CR2032 battery

Solve the DS1307 with a backup battery can not read and write problems.

When fully charged, can provide DS1307 timing 1 year.

Compact design, 27mm * 28mm * 8.4mm

Leads to the DS1307 clock pin for the microcontroller to provide the clock signal.

Other I2C devices can be cascaded.