"#" indicates a package specification code.














Date of discontinuation: 30 Jun 2016

< List of part numbers with package codes > DEBB33A222KA2B

Shape

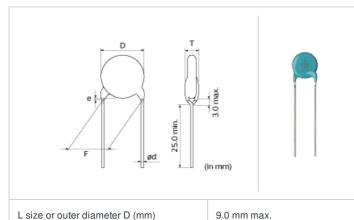

4.0 mm max.

5.0 ±1.0mm

0.6 ±0.05mm

Up to the end of crimp

Notes

Please use replacement



References

Packaging	Specifications	Minimum quantity
В	Packing in bulk	250

Specifications

Tsize

Lead spacing F

Lead diameter d

Paint dripping e

Capacitance	2200pF±10%
Rated voltage	1000Vdc
Temperature characteristics (complied standard)	B(JIS)
Capacitance change rate	±10%
Temperature range of temperature characteristics	-25 to 85°C
Operating temperature range	-25 to 85°C

1 of 1



^{1.}This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



^{2.} This datasheet has only typical specifications because there is no space for detailed specifications.