




- **W-25 ( 25A )**




**FEATURES:**

- High output and high impedance
- Waterproof

**DIMENSIONS: (Unit: mm)**

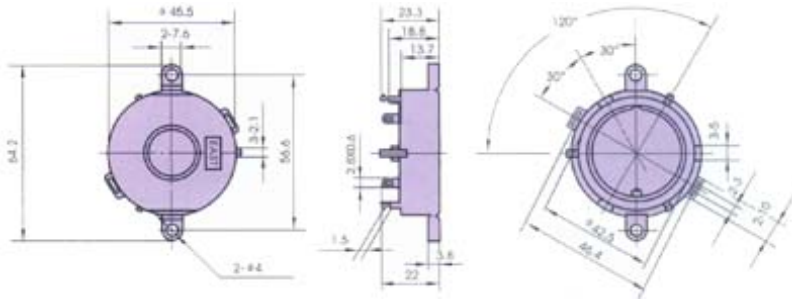

**CHARACTERISTICS:**

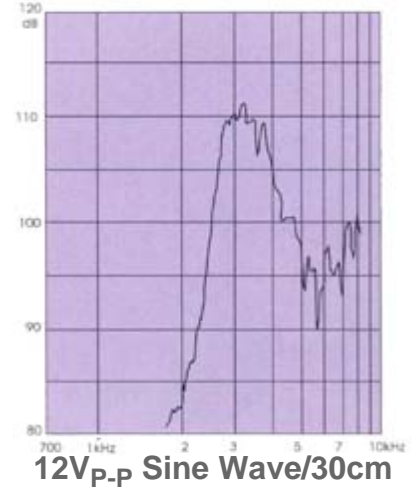

<b>ELECTRICAL SPECIFICATIONS :</b>		
<b>Model No.</b>	<b>W-25</b>	<b>W-25A</b>
Min. Sound Pressure Level (dB)	105/1 Feet/ 12V <sub>p-p</sub> Sine Wave	
Capacitance at 120 Hz (nF)	140 ± 30%	
Resonant Frequency Range (Hz)	2200 ~ 4000	
Max. Continuous Drive Voltage at Square Wave (50% duty cycle) (V <sub>p-p</sub> )	50	
Max. Intermittent Drive Voltage at Square Wave (50% duty cycle) (V <sub>p-p</sub> )	60	
Operating Temperature (°C)	-40 ~ +80	-40~ +105
Weight (g)	12	
Case Material/Colour	PA6/Black	
<b>PACKING INFORMATION :</b>		
Packing :	400 pcs per export carton	
Carton Size :	47 X 30.5 X 35 cm	
G. Weight :	6.3 kgs	
N. Weight :	4.8 kgs	