
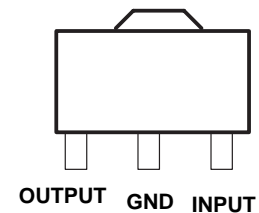


- 3-Terminal Regulators
- Output Current up to 100 mA
- No External Components
- Internal Thermal-Overload Protection
- Internal Short-Circuit Current Limiting
- Direct Replacements for Fairchild  $\mu$ A78L18 Series

### description

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power-pass elements to make high-current voltage regulators. One of these regulators can deliver up to 100 mA of output current. The internal limiting and thermal-shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a zener diode-resistor combination, an effective improvement in output impedance can be obtained, together with lower bias current.



**SOT-89**  
**78L18CPK**

### electrical characteristics at specified virtual junction temperature, $V_I = 26V$ , $I_O = 40mA$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T ‡	78L18			UNIT
			MIN	TYP	MAX	
Output voltage		25°C	17.3	18	18.7	V
	$I_O = 1mA$ to 40MA, $V_I = 20.5$ to 33V	Full range	17.1	18	18.9	
	$I_O = 1$ mA to 70 mA	Full range	17.1	18	18.9	
Input voltage regulation	$V_I = 20.5V$ to 33V	25°C		70	360	mV
	$V_I = 22V$ to 33V			64	300	
Ripple rejection	$V_I = 21.5V$ to 31.5V, $f = 120$ Hz	25°C	32	36		dB
Output voltage regulation	$I_O = 1$ mA to 100 mA	25°C		27	180	mV
	$I_O = 1$ mA to 40 mA			19	90	
Output noise voltage	$f = 10$ Hz to 100 kHz	25°C		89		$\mu$ V
Dropout voltage		25°C		1.7		V
Bias current		25°C		4.7	6.5	mA
		125°C			6	
Bias current change	$V_I = 22V$ to 33V	Full range			1.5	mA
	$I_O = 1$ mA to 40 mA				0.1	

‡ Pulse-testing techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33- $\mu$ F capacitor across the input and a 0.1- $\mu$ F capacitor across the output. Full range for the 78L05 is  $T_J = 0^\circ C$  to  $70^\circ C$

# WS 78L18


## absolute maximum ratings over operating temperature range (unless otherwise noted)

78L18	PARAMETER	UNIT
Input voltage, $V_I$	35	V
Virtual junction temperature range, $T_J$	150	°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260	°C
Storage temperature range, $T_{stg}$	-65 to 150	°C

## recommended operating conditions

78L18	MIN	MAX	UNIT
Input voltage, $V_I$	20.5	33	V
Output current, $I_O$		100	mA
Operating virtual junction temperature, $T_J$	0	70	°C

### Pad Location 78L18

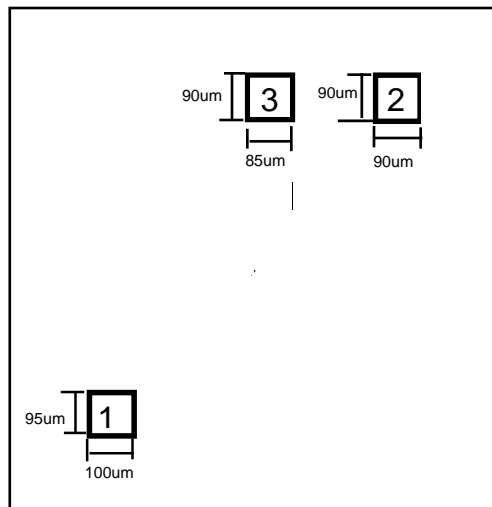

Chip size 1.0 x 1.2 mm

Pad N	Pad Name	X (um)	Y (um)
1	Ground	95	100
2	Input	820	1010
3	Output	535	1015

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.