




Quartz Crystal


SMD-version

model	KX – 7T
frequency	26,0 MHz
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 10 ppm
temperature tolerance -40° ~ + 85°C	± 10 ppm
load capacitance C_L	10 pF
series resonance R_1 max.	50 Ohm
aging at 25°C (first year) max.	± 2 ppm
shunt capacitance C_0 max.	5,0 pF
drive level in mW max.	0,05
RoHS	according to RoHS 2011/65/EU
contents of reel	1000 pcs.
part no.	12.88596


Dimensions (mm):

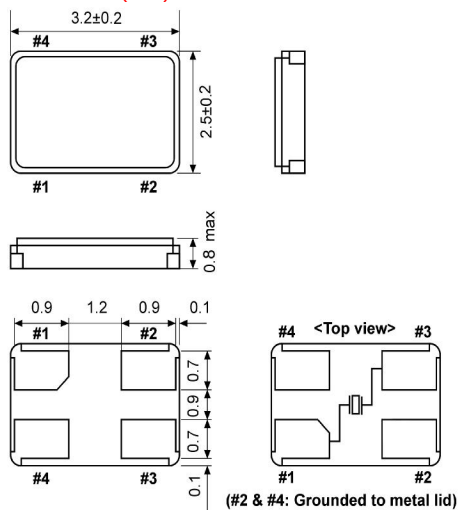

Suggested soldering pad:



Reflow soldering condition:

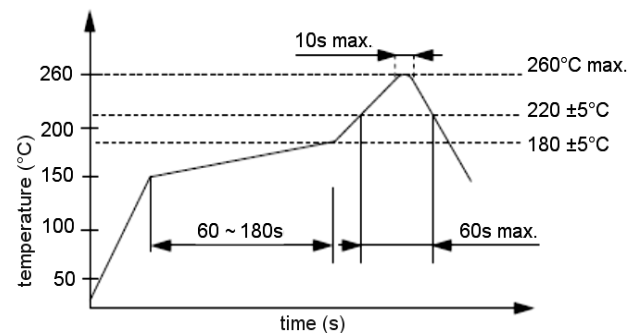

Tape specification:

